

Product Description

Ecispray is an ETA acoustic spray system. It absorbs sound in the places where it is applied and provides an understandable acoustic quality of the speech sound in the space. Since its applied by spraying, it can be applied to all substrates in the building. Eci provides a decorative visuality to the applied surfaces and contributes to the visual design in the space, material selection can be made in the desired colors.

Scope of Application

Ecispray can be applied in old and new buildings where acoustic treatment is needed. Restaurants, schools, classrooms, residential buildings, night clubs, auditorium, swimming pools, gyms, offices, cafes, bars, conference rooms, etc.



Key Features

- Compatible with all substrates
- ECO Friendly
- Made from recycled cellulose fibers
- Custom colors are available
- Balance the humidity of the air. Absorbs excess humidity
- Provides excellent sound absorption
- Provides excellent thermal insulation
- Can be painted over after sprayed

Acoustic Rating

Ecispray Standard Texture 35mm.

125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	aw
0.32	0.75	0.96	1.04	1.01	1.11	1.00

Fire Class

TS EN 13501-1 B-s2, d0

Thermal Conductivity

λ : 0,038 W/(m.K)

Water vapour Diffusion Resistance Factor μ

TS EN 12086 : 2.6

Water Absorption

TS EN 1609 : 13.88 kg / m²

Textures

Smooth Texture

Fine Texture

Standard Texture

Coarse Texture

Colors

High-White (Premium Line)

Standart-White (Premium Line)

Black (Premium Line)


Anthracite (Premium Line)

Concrete Grey (Premium Line)

Eco-Grey (EcoLine)

Beige (EcoLine)

Custom colors are available according to the **RAL** code.

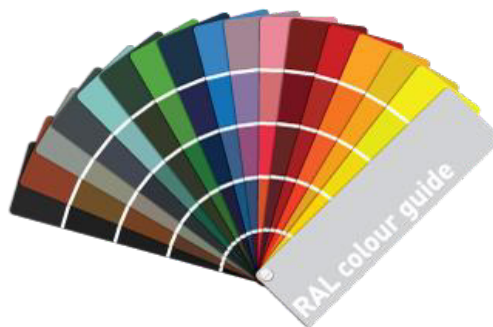

Ecispray Preparation

Surfaces have to be clean and free of dust

Application area should be airtight

If necessary, substrates should be primed before spraying

If there is any indentation on the substrates they should be repaired before spraying

Electrical cables, plumbing pipes must be masked

Electricity boxes need to be extended in the thickness of the spray work

Undesirable surfaces should be masked before spraying.

Project Inspiration





ECI Ecologic Cellulose Insulation - Turkey

Best Ecological Insulation Product Company - Turkey

ETA Certified

ETA 21/0462



Europhon Acoustics

**Suite No: 238, Al Shafar Investment Building,
Sheikh Zayed Road, Al Quoz, P.O. Box: 212688,
Dubai, UAE**

+971 4 268 4667

**info@europhonacoustics.com
www.europhonacoustics.com**