

# SoundWall

## IIIII

UNC is probably the only one company in Cyprus that, along with supply and manufacturing, provides Designing and Installation, from experienced Acoustic Consultants and Installers respectively. Moreover, UNC has acoustic material in stock and the probably only one in Cyprus, brand-new showroom with exclusively acoustic materials and systems.

**URBAN  
NOISE  
CONTROL**

## SoundWall

SOUNDWALL is acoustic panel, as wooden slats, which can be placed to ceilings or to walls and provide significant sound absorption and desired aesthetics, within various types (private, special, commercial) of rooms.

The rectangular-shaped panels are being placed one next to each other, without joints in-between, resulting in a seamless-continuous run (finish) of panelling, into walls/ceilings.

The SOUNDWALL is guaranteed to bring a visually eye-catching wallcovering solution to any project, through a cost-effective solution.



## DESIGNING AND INSTALLATION

Apart from being suppliers and manufactures, UNC provide Designing and Installation services.

A specialised team of Acoustic Consultants and an experienced team of Acoustic Materials/systems Installers could carry out an end-to-end service for Acoustic treatment.

## PRODUCT AVAILABILITY AND SAMPLES

UNC always have stock of the product and samples of each one of it. Feel free to contact us, in order to setting up a meeting in our showroom.



## SPECIFICATIONS

### MAINTENANCE

It can be cleaned by using a dust broom, a vacuum cleaner or a hard-wrung cloth.



### SUSTAINABILITY

Those panels are made from sustainable materials. The felt is made from recycled plastic and the wood from sustainable forestry.



### MOISTURE RESISTANT

Wooden material has high moisture resistance due to high melamin content of resin used and so it can be also used in kitchens and bathrooms with the correct finishing.

### NON TOXIC

The formaldehyde emission of wooden slats is classified E0 grade (with desiccator method).



### FLAME RETARDANT

#### Polyester Fiber

Class B-s1, d0 [EN-13501-1]

#### Wood

Class B-s2, d0 [EN-13501-1]


## MATERIAL

The panels are manufactured as a combination of polyester fiber (PET) and coloured MDF or Veneered MDF and supplied/installed as pre-assembled panels.

### FRONT

#### OPTION 1:

MDF coloured  
or White Oak  
or Iroko  
or Ash

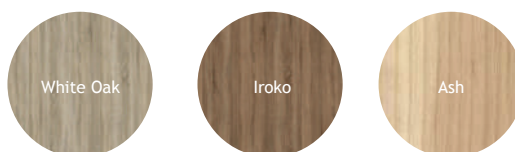

#### OPTION 2:

Colour MDF Veneered

Consistent colour distribution from surface to all the way through. Variety of colours as option enable creation, based on client's willing and project requirements.



#### COLOURS NOTES

\*Boards can present colour variations due to the wood's natural changes of tone and to the use of organic dyes only.

\*The tone of the surface may get darker with a finishing applied.(varnish, oil, wax)

### BACK

100% Polyester Fiber  
Board 12mm







## STANDARD DIMENSIONS AND TYPES

### Size

2400x600mm

### Total thickness

20mm

### Slat width

30mm

### Slat to slat



10mm

### Surface material

MDF or Iroko or Oak (8mm)

### Back material

PET acoustic panel (12mm)

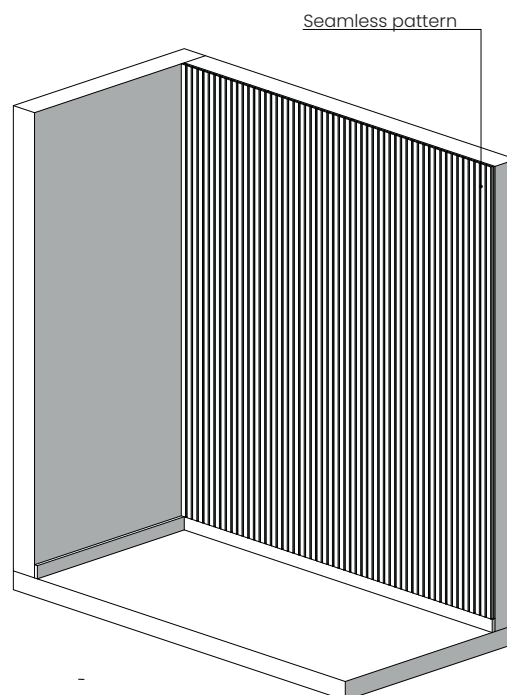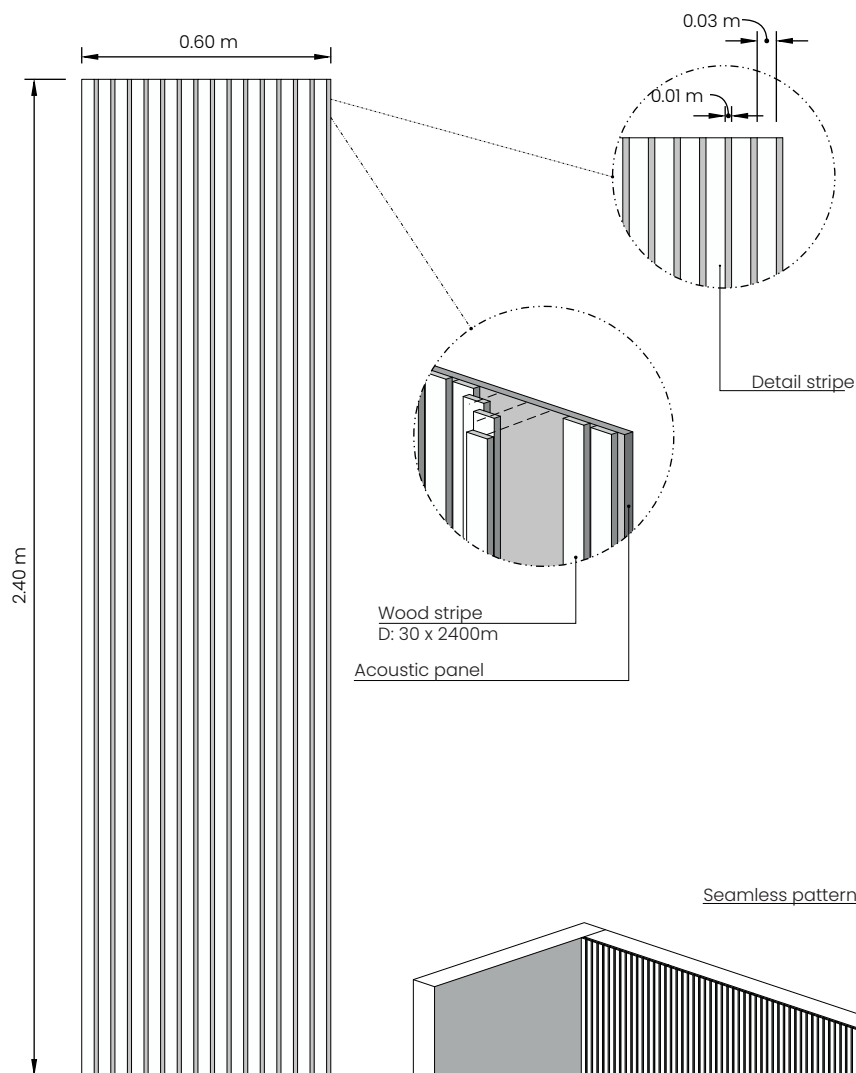








## STANDARD DIMENSIONS AND TYPES

### SoundWall PLUS


#### Additional backing material

Mineral wool (50mm)

\* Can also be customized depending on the requirements of each application.

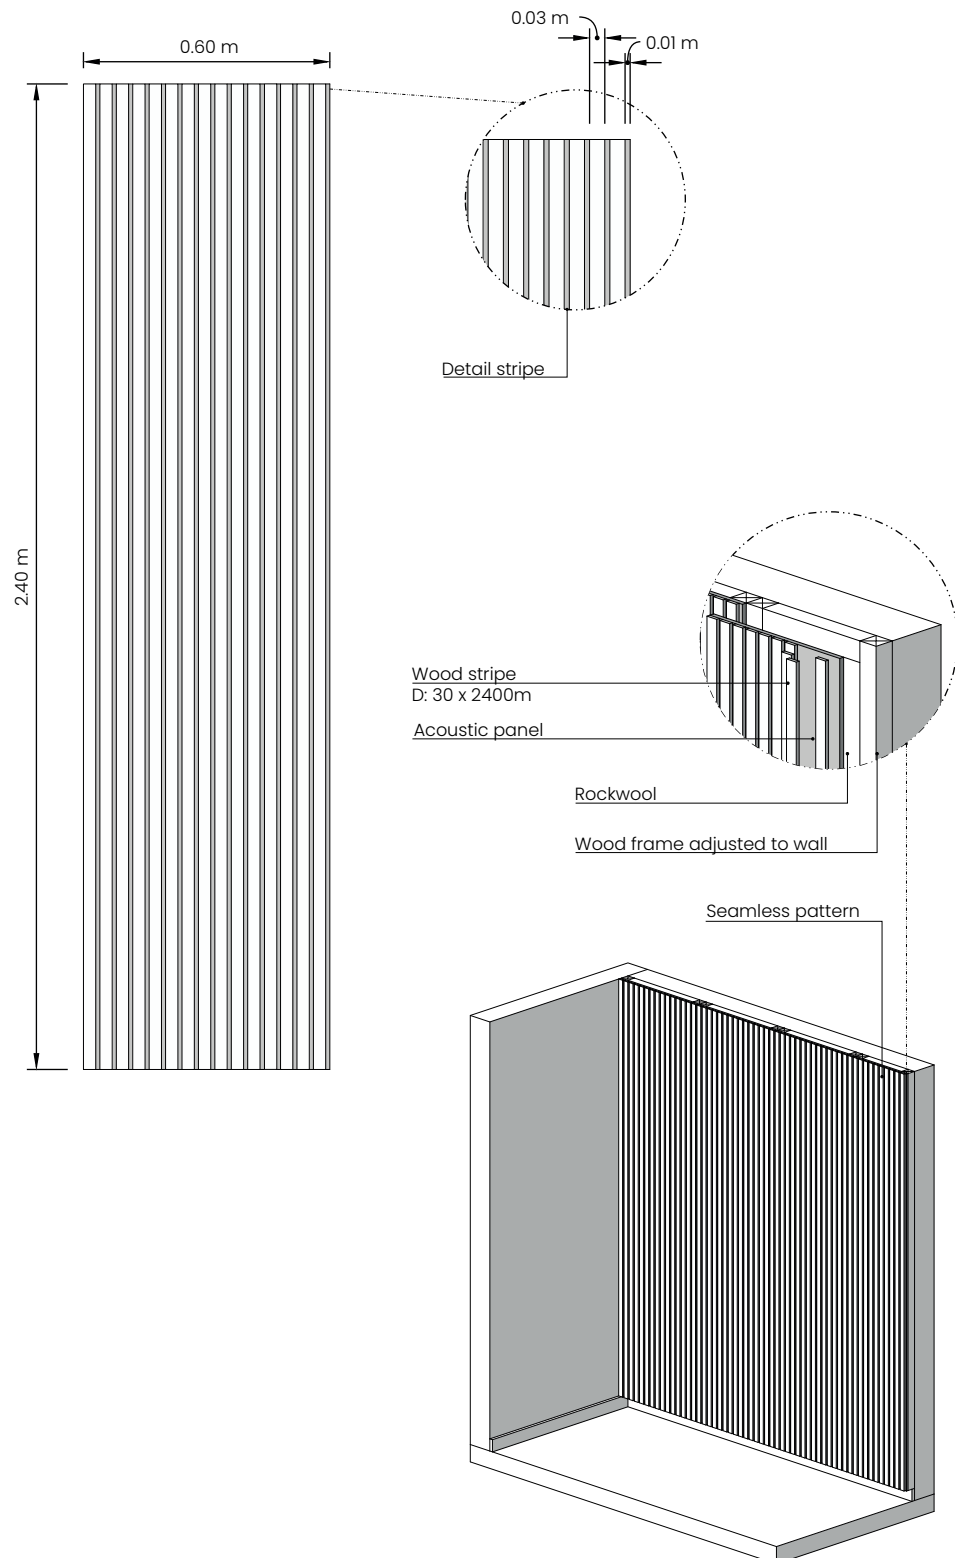

## SOUND ABSORPTION

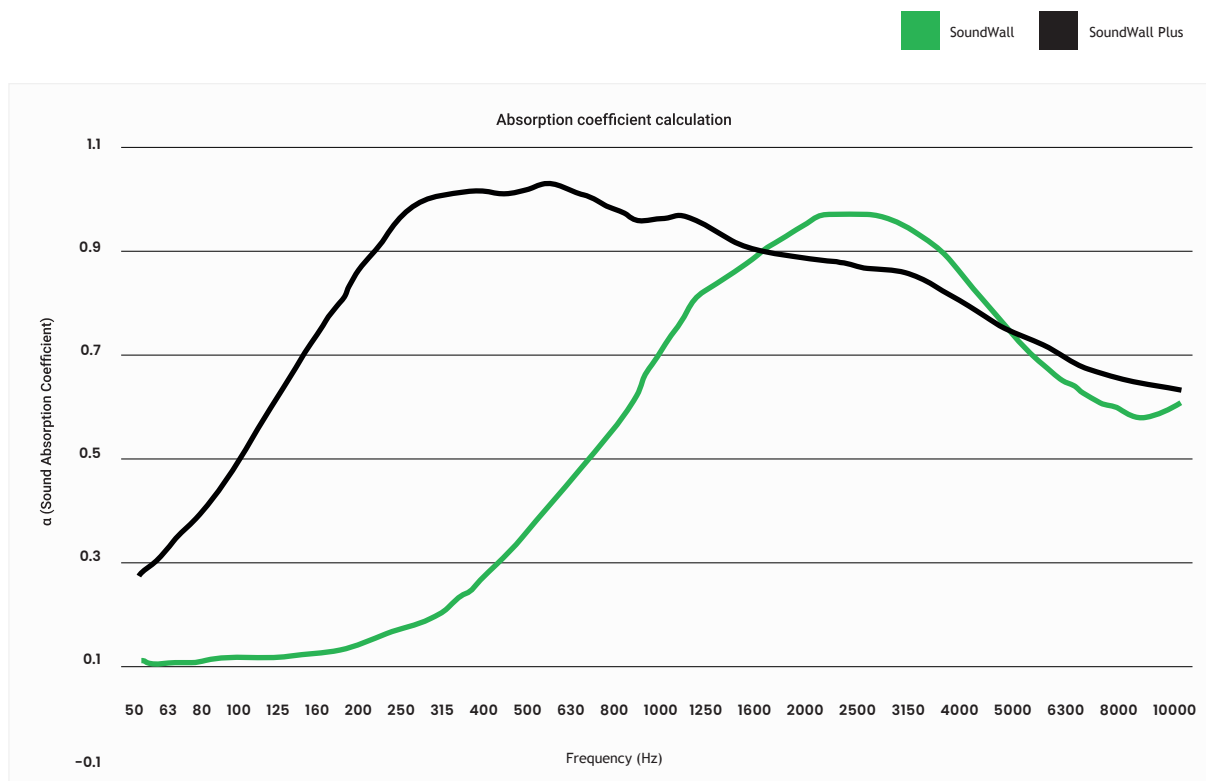

### SoundWall

Sound class D ( $\alpha_w=0.45$ )  
 [according to specialised  
 acoustic software]  
 (system total thickness 20mm)

### SoundWall Plus

Sound class B ( $\alpha_w=0.85$ )  
 [according to specialised  
 acoustic software]  
 (with additional backing  
 material of mineral wool 50mm)

## SOUND ABSORPTION

Frequency (Hz)	$\alpha$ random		$\alpha$ random	
	SoundWall		SoundWall Plus	
50	0.01	0.01	0.19	0.29
63	0.01		0.28	
80	0.02		0.41	
100	0.02	0.04	0.56	0.70
125	0.04		0.71	
160	0.06		0.84	
200	0.1	0.16	0.95	0.97
250	0.15		0.98	
315	0.23		0.97	
400	0.34	0.46	1	0.96
500	0.46		0.96	
630	0.59		0.92	
800	0.73	0.80	0.93	0.89
1000	0.8		0.88	
1250	0.86		0.85	
1600	0.93	0.92	0.84	0.82
2000	0.93		0.82	
2500	0.89		0.81	
3150	0.81	0.71	0.76	0.71
4000	0.7		0.7	
5000	0.61		0.66	
6300	0.56	0.54	0.61	0.59
8000	0.51		0.59	
10000	0.54		0.57	



SoundWall  
SYSTEM



**Suite No: 238, Al Shafar Investment Building,  
Sheikh Zayed Road, Al Quoz, P.O. Box: 212688,  
Dubai, UAE**

**+971 4 268 4667**

**[info@europhonacoustics.com](mailto:info@europhonacoustics.com)  
[www.europhonacoustics.com](http://www.europhonacoustics.com)**